


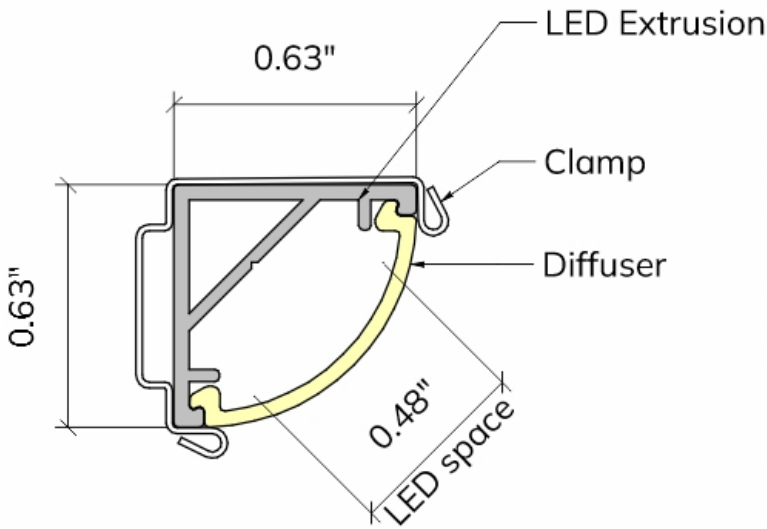

specialty lighting reserves the right to make changes without prior notice. (03.25.2025)
Aluminum body with end caps and attachment clips. Install at 90 degree angles. Height 5/8" x 5/8"

CLA16
CLA 16

CLA16 -


Output
27 - 2700 K 418 lm/ft 4.45 w/f
30 - 3000 K 418 lm/ft 4.45 w/f
35 - 3500 K 437 lm/ft 4.45 w/f
40 - 4000 K 448 lm/ft 4.45 w/f
CRI 90

Finish
AL - Aluminum Finish
WH - White
BK - Black
CU - Custom Color
Specify RAL color


Runs
A - 1' nominal module 12"
Use for not even number in runs
B - 2' nominal module 24"
C - 3' nominal module 36"
D - 4' nominal module 48"
E - 5' nominal module 60"
F - 6' nominal module 72"
G - 7' nominal module 84"
H - 8' nominal module 96"
Total Run: (0 ft 0 in)

Emergency
00 - No Emergency
EM - Emergency



Notes:
Specialty Lighting architectural will generate submittals when having runs
end caps and clips (installation, minimal 18" OC) by runs.

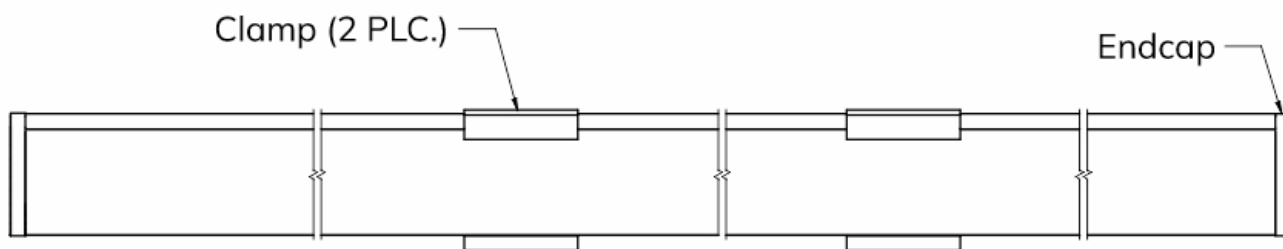

Front view

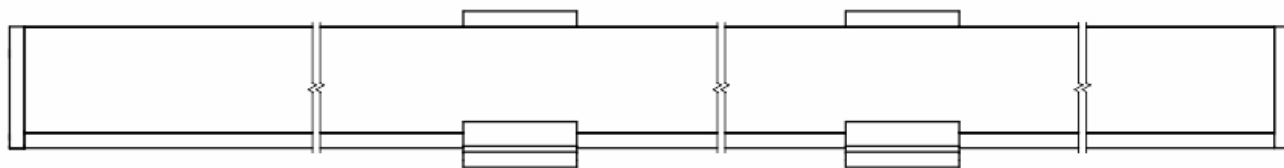

Bottom view

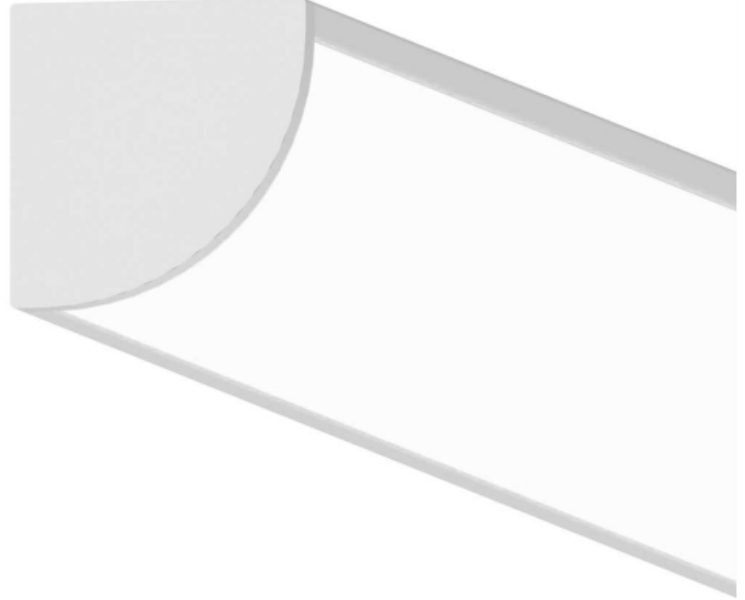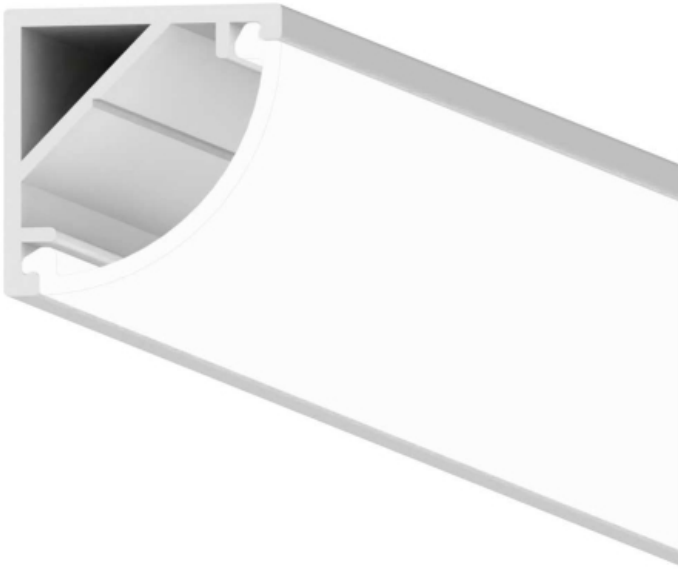



Driver Boxes

