


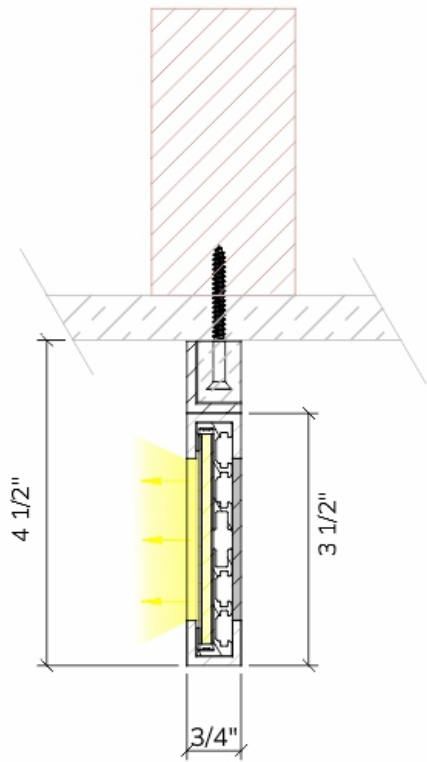

specialty lighting reserves the right to make changes without prior notice. (03.10.2025)

Diffusion Beam 3 , wall and ceiling mounted, in extruded aluminum minimal design lighting fixture with remote drivers (max 60' from fixture). Even illumination at highest lumen output. 960 lumens delivered per foot, 12 w/foot. Dimmable and non dimmable. Lighting module width 3.25". Possible runs. Horizontal and / or vertical.

Bedi3

Beam Diffusion 3

Bedi3 -	Output
	35HO - 3500 K 960 lumens / ft 12 w /ft
	35 - 500 K 640 lumens / ft 6 w /ft
	40HO - 4000 K 960 lumens / ft 12 w /ft
	40 - 4000 K 640 lumens / ft 6 w /ft
	2700 K and 3000 K available for special ordering
	Consult factory for other color temperatures


Finish
WH - White
BK - Black
CU - Custom color
Specify RAL color




Dimming	Installation	Runs
4 - Dimmable 0-10v (4wires, 120 or 277 v)	Ce - Ceiling	B - 2' nominal 23" LED module
1 - Non Dimmable 277v	Wa - Wall	C - 3' nominal 35" LED module
0 - Non Dimmable 120v		D - 4' nominal 47" LED module
		E - 5' nominal 59" LED module
		F - 6' nominal 71" LED module
		G - 7' nominal 83" LED module
		H - 8' nominal 95" LED module
		Total Run: (0 ft 0 in)
		Wall installation module max length 6'

Emergency	Notes:
00 - No Emergency	McAdam 3 Bin
EM - Emergency	max distance to drivers 60'
Max 4'	CRI >90


Diffusion Beam 3

Diffusion / Ceiling/Wall

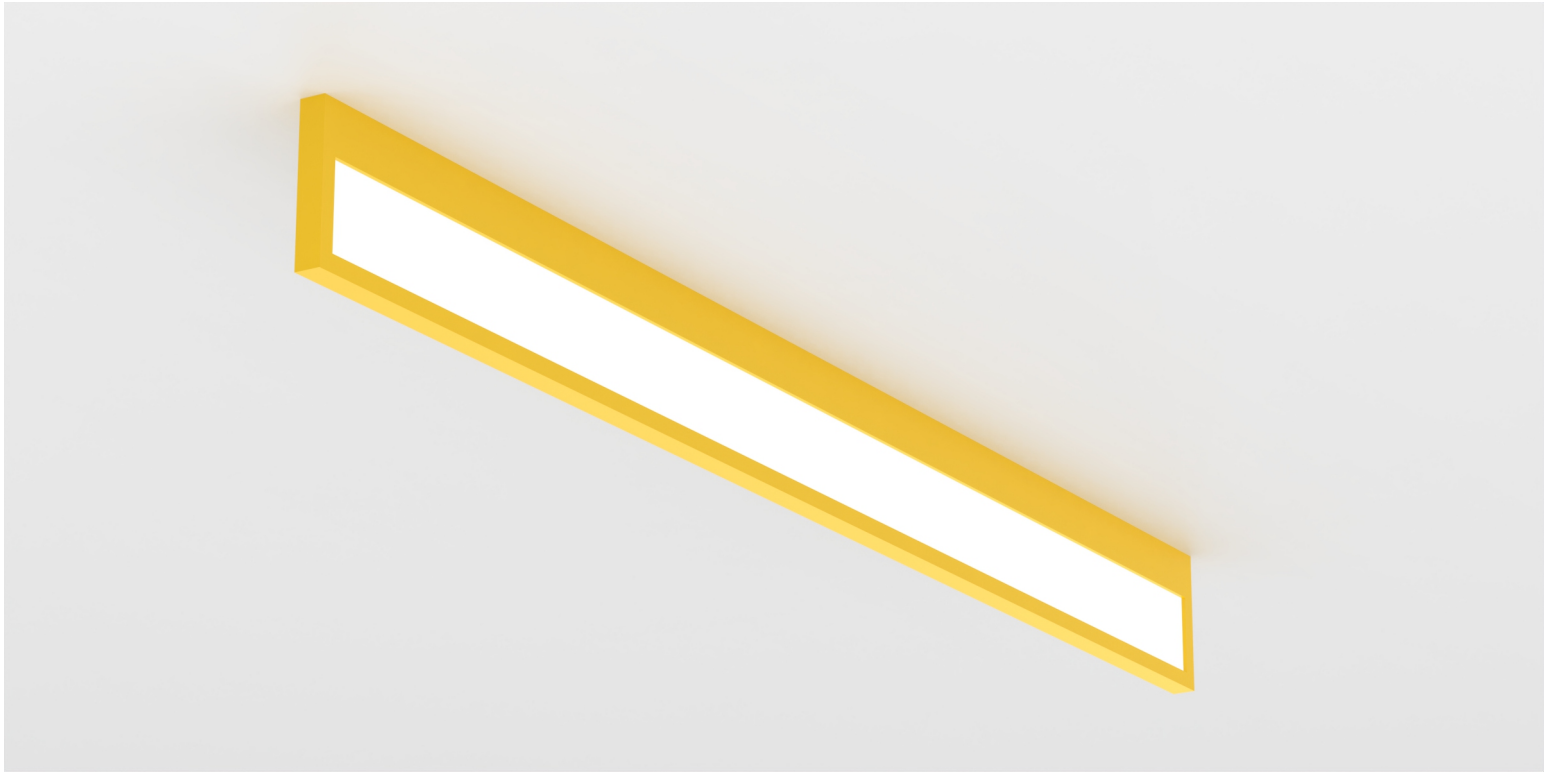

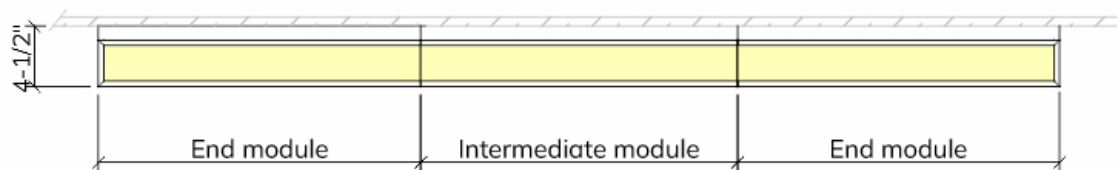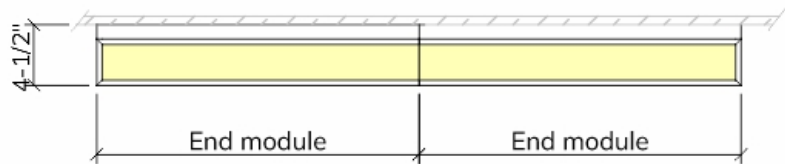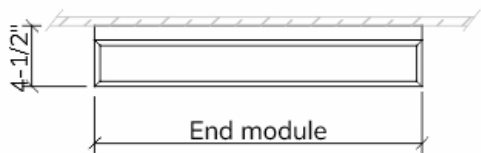

Nominal feet	LED module length
2'	23"
3'	35"
4'	47"
5'	59"
6'	71"
7'	83"
8'	95"

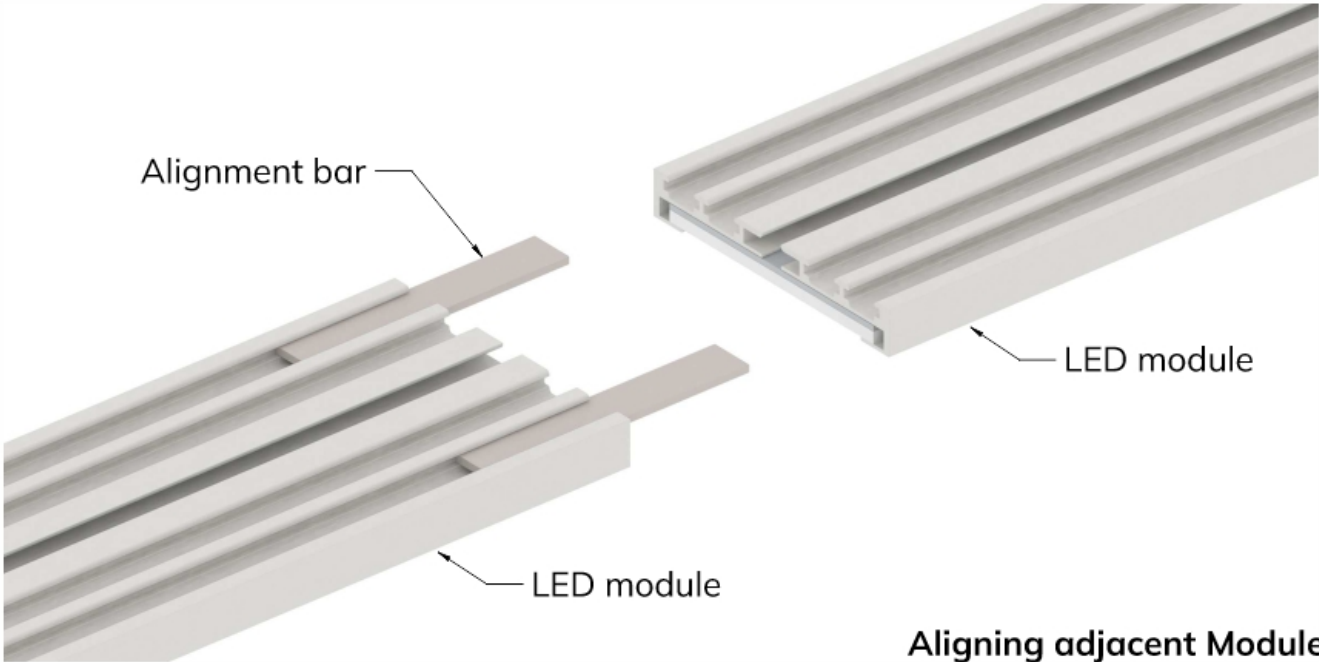

Aligning adjacent Modules



Driver Boxes

