
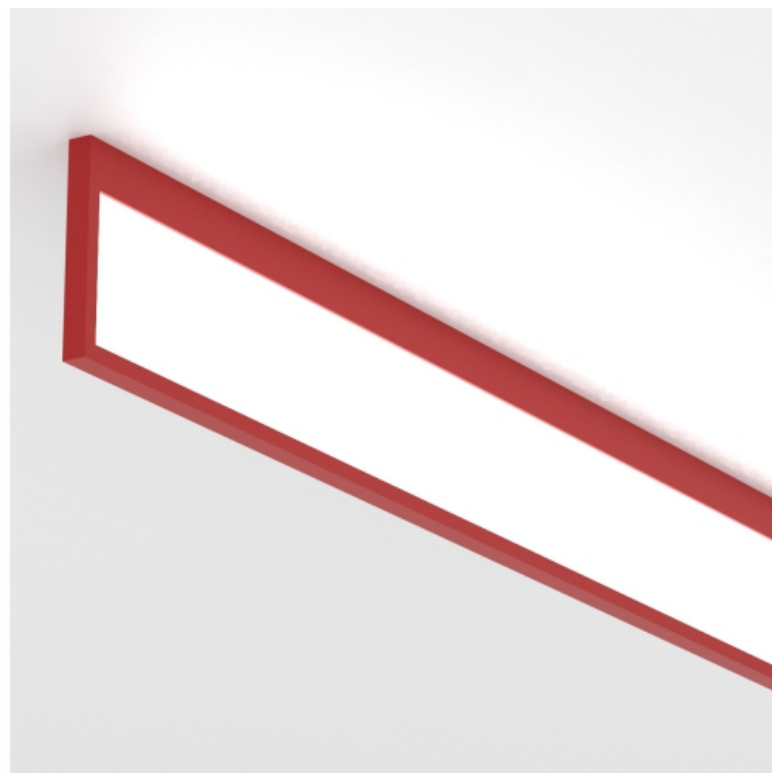


Diffusion Beam 5

Diffusion / Ceiling/Wall

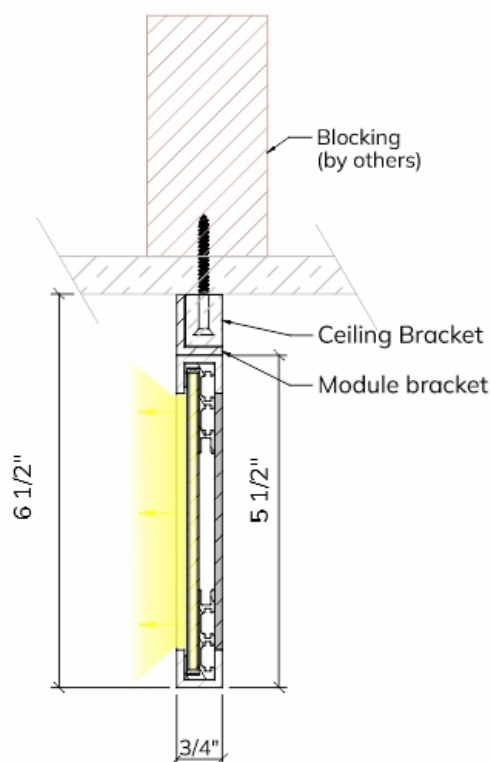

specialty lighting reserves the right to make changes without prior notice. (03.11.2025)

Diffusion Beam 5 , wall and ceiling mounted, in extruded aluminum minimal design lighting fixture with remote drivers (max 60' from fixture).

Even illumination at highest lumen output. 960 lumens delivered per foot, 12 w/foot. Dimmable and non dimmable. Lighting module width 3.25".

Possible runs. Horizontal and / or vertical.

DiffusionBeam

Beam Diffusion 5

Bedi5 -

Output

35HO - 3500 K 960 lumens / ft 12 w /ft

35 - 500 K 640 lumens / ft 6 w /ft

40HO - 4000 K 960 lumens / ft 12 w /ft

40 - 4000 K 640 lumens / ft 6 w /ft

2700 K and 3000 K available for special ordering

Consult factory for other color temperatures

Finish

WH - White

BK - Black

CU - Custom color

Specify RAL color

Dimming

4 - Dimmable 0-10v (4wires, 120 or 277 v)

1 - Non Dimmable 277v

0 - Non Dimmable 120v

Installation

Ce - Ceiling

Wa - Wall

Runs

B - 2' nominal 23" LED module

C - 3' nominal 35" LED module

D - 4' nominal 47" LED module

E - 5' nominal 59" LED module

F - 6' nominal 71" LED module

G - 7' nominal 83" LED module

H - 8' nominal 95" LED module

Total Run: (0 ft 0 in)

Wall installation module max length 6'

Emergency

00 - No Emergency

EM - Emergency


Max 4'




Notes:

McAdam 3 Bin


max distance to drivers 60'

CRI >90

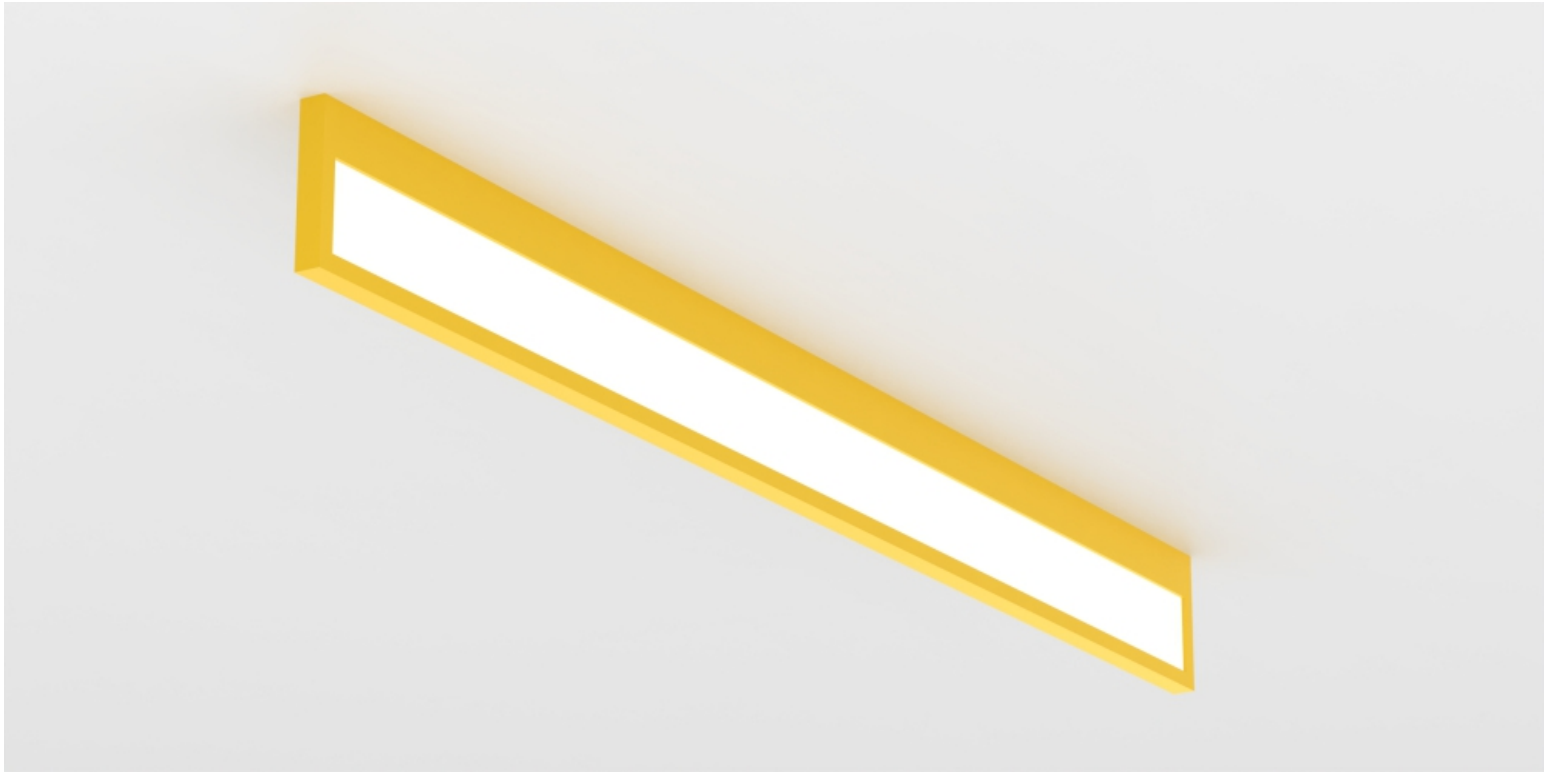

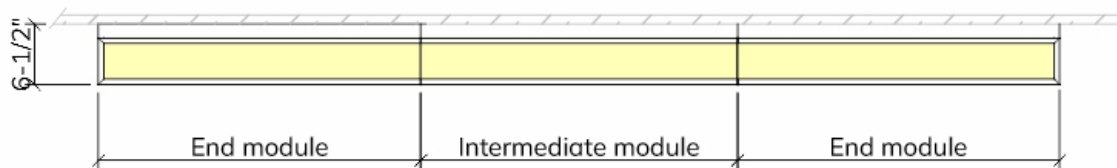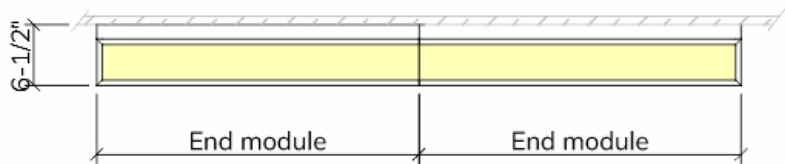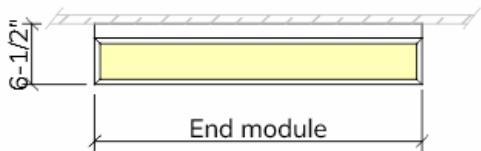

Nominal feet	LED module length
2'	23"
3'	35"
4'	47"
5'	59"
6'	71"
7'	83"
8'	95"

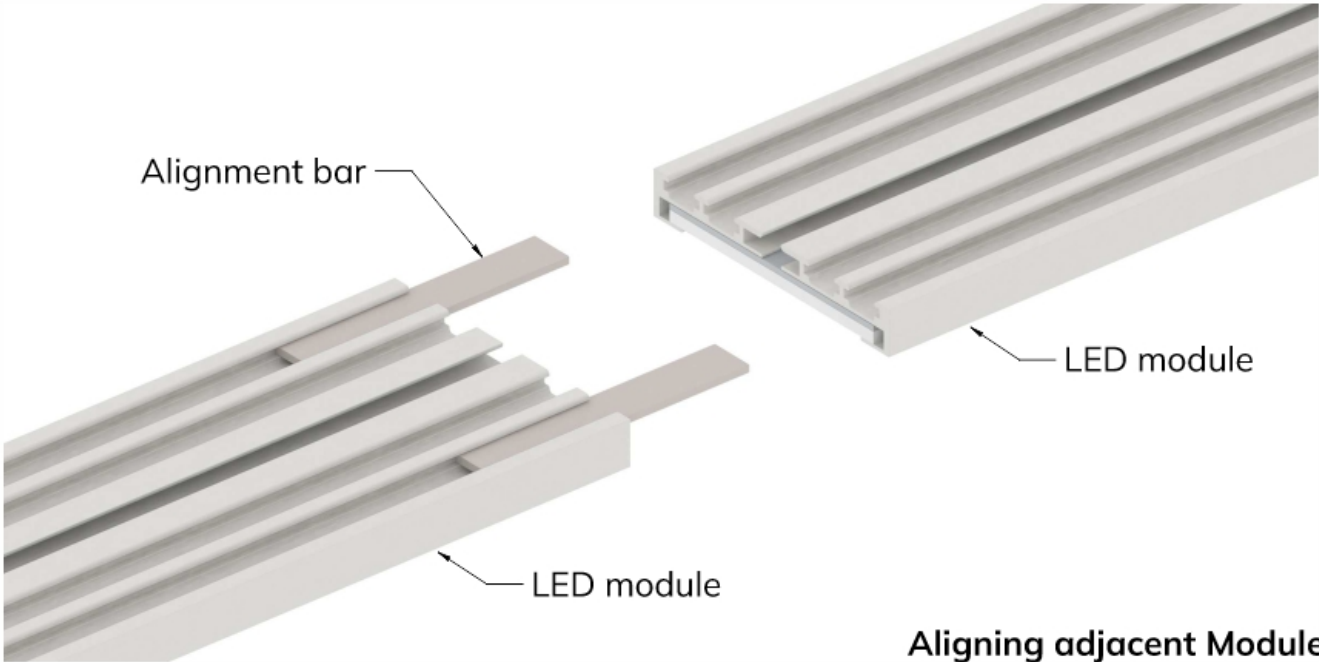

Aligning adjacent Modules

Driver Boxes

