
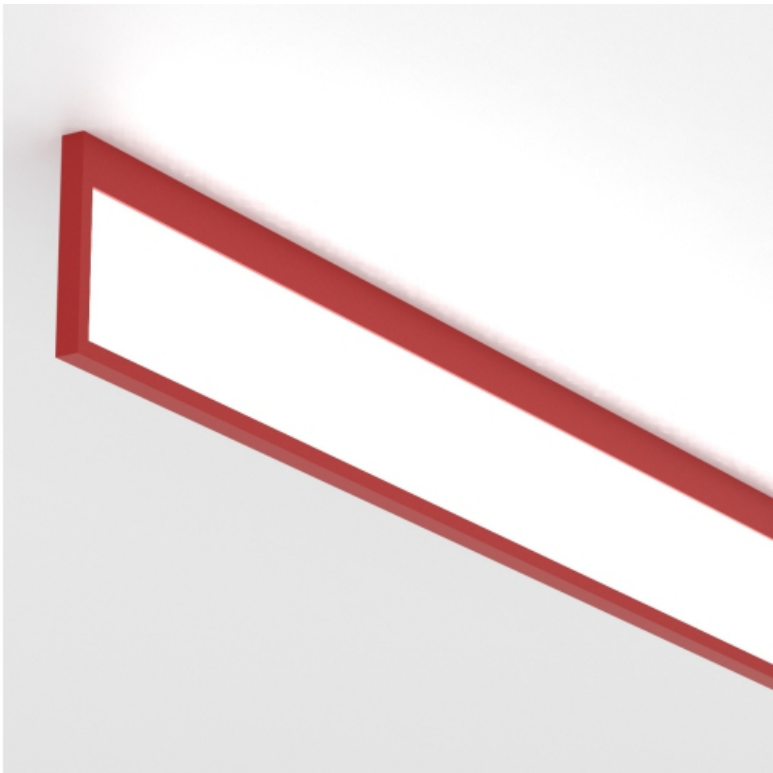


Diffusion Beam 5 Double

Diffusion / Ceiling/Wall

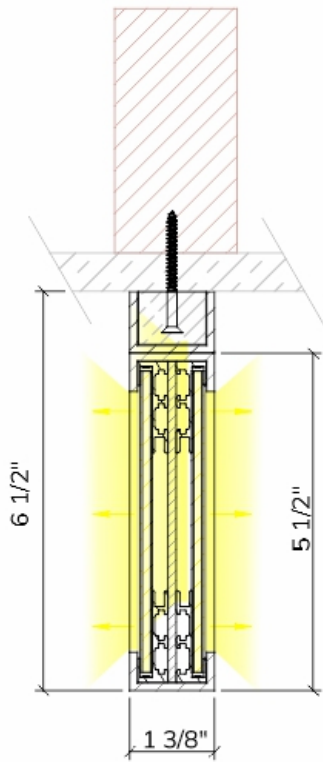

specialty lighting reserves the right to make changes without prior notice. (03.11.2025)
Diffusion Beam 5 Double, light towards but sides of the product. Wall and ceiling mounted, in extruded aluminum minimal design lighting fixture with remote drivers (max 60' from fixture).
Even illumination at highest lumen output. 960 lumens delivered per foot, 12 w/foot in each direction. Dimmable and non dimmable. Lighting module width 5.25".
Possible runs. Horizontal and / or vertical.

Diffusion Beam Beam Diffusion Double 3

BediDoub3 -

Output
35HO - 3500 K 960 lumens / ft 12 w /ft
35 - 500 K 640 lumens / ft 6 w /ft
40HO - 40HO - 4000 K 960 lumens / ft 12 w /ft
40 - 4000 K 640 lumens / ft 6 w /ft
2700 K and 3000 K available for special ordering
Consult factory for other color temperatures

Finish
WH - White
BK - Black
CU - Custom color
Specify RAL color

Dimming
4 - Dimmable 0-10v (4wires, 120 or 277 v)
1 - Non Dimmable 277v
0 - Non Dimmable 120v

Installation
Ce - Ceiling
Wa - Wall

Runs
B - 2' nominal 23" LED module
C - 3' nominal 35 LED module
D - 4' nominal 47" LED module
E - 5' nominal 59" LED module
F - 6' nominal 71" LED module
G - 7' nominal 83" LED module
H - 8' nominal 95" LED module
Total Run: (0 ft 0 in)
Wall installation module max length 6'

Emergency

00 - No Emergency

EM - Emergency



Max 4"

Notes:

McAdam 3 Bin

max distance to drivers 60'


CRI >90

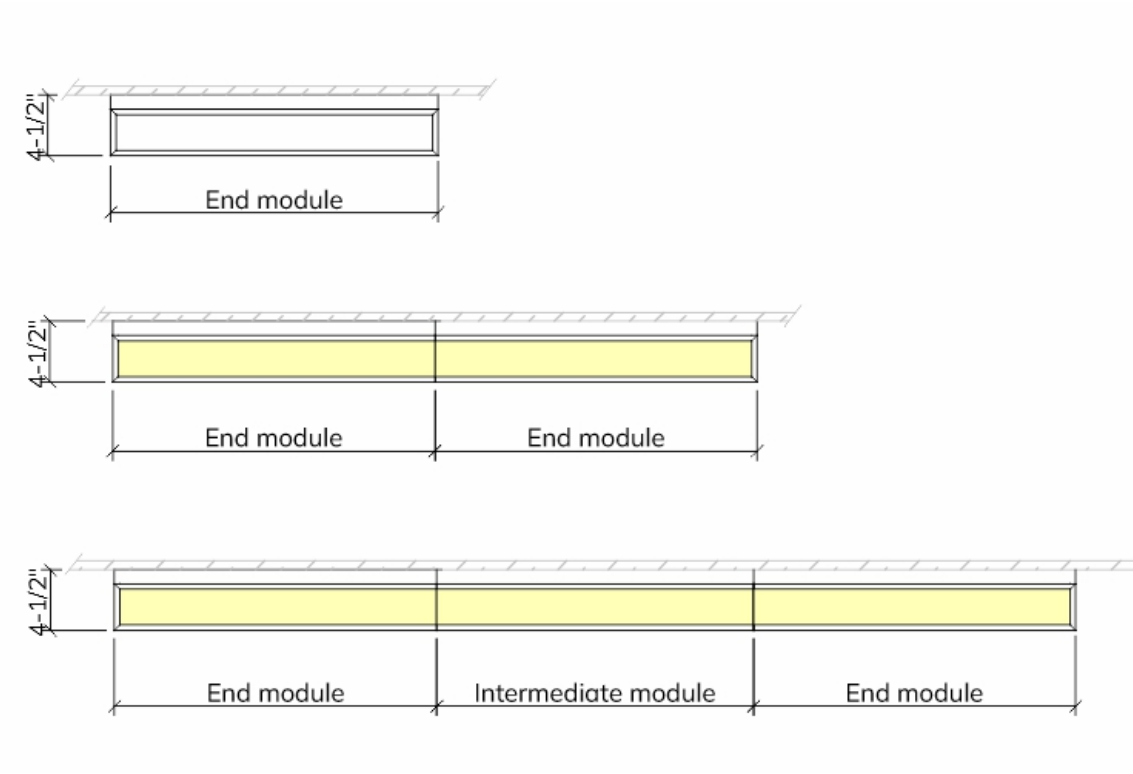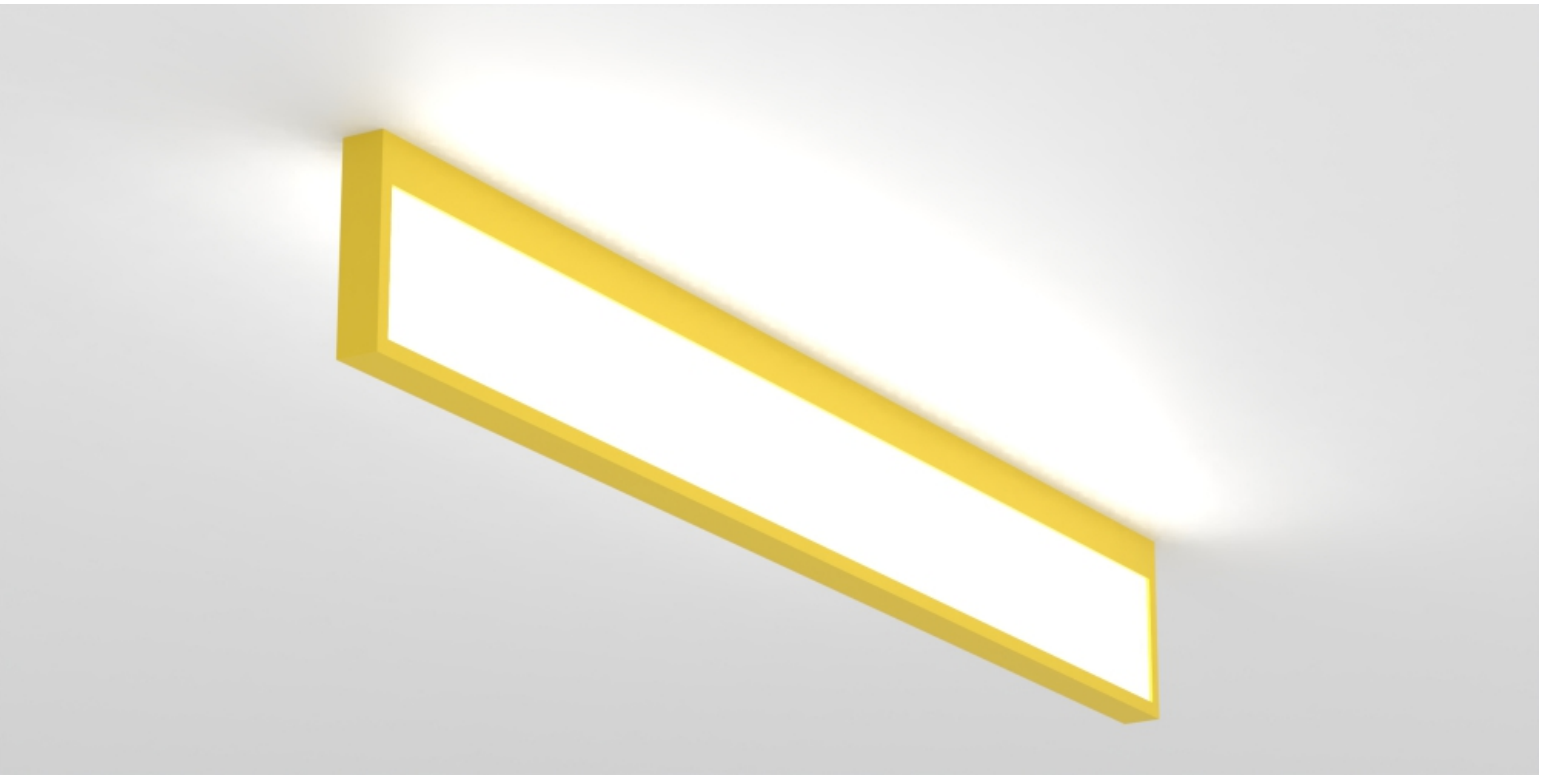

Nominal feet	LED module length
2'	23"
3'	35"
4'	47"
5'	59"
6'	71"
7'	83"
8'	95"

Diffusion Beam 5 Double

Diffusion / Ceiling/Wall

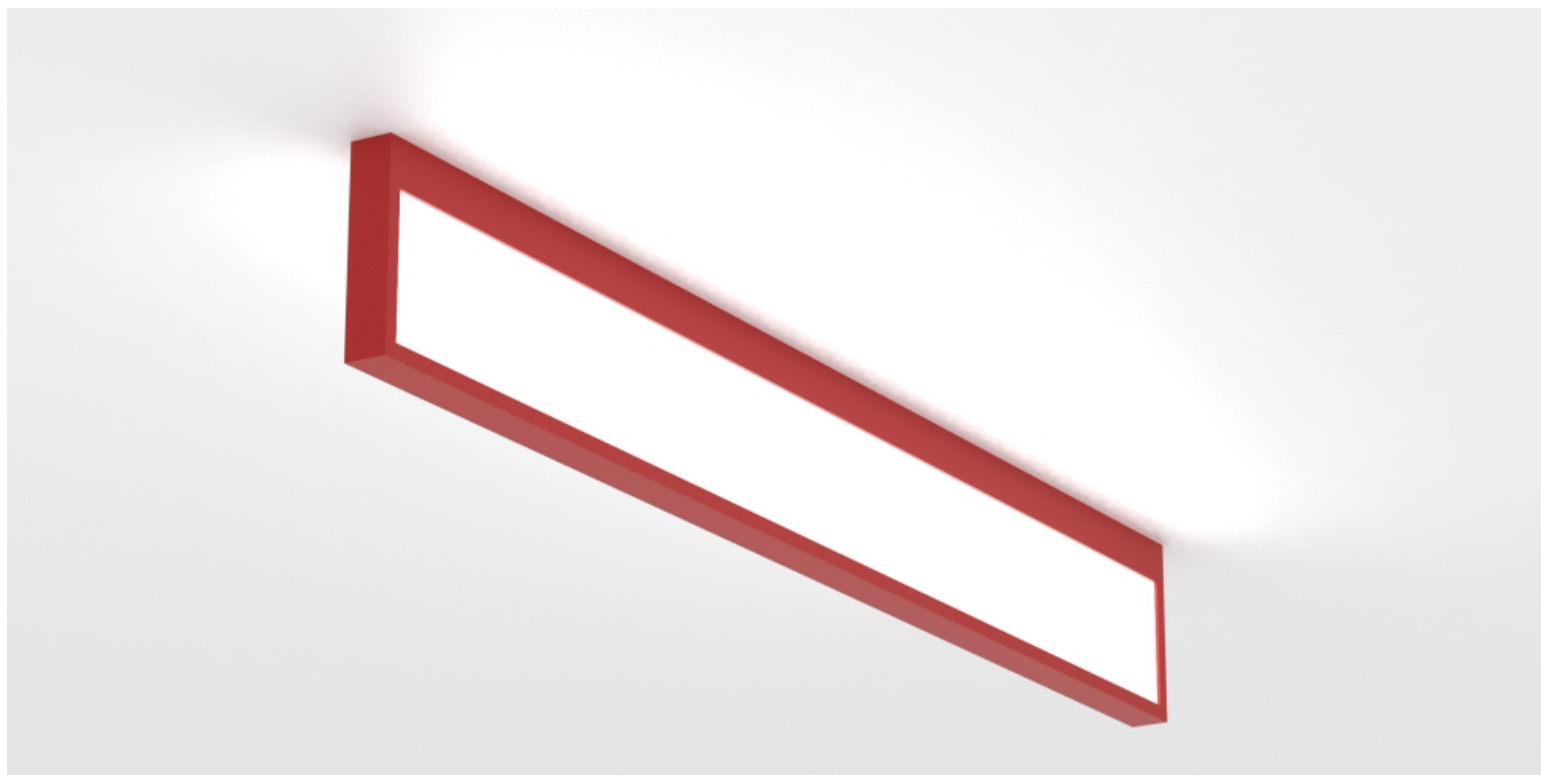

Driver Boxes

